

Europäisches Patentamt
Europ an Patent Office
Offic européen d s brevets



(11) **EP 1 184 141 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
06.03.2002 Bulletin 2002/10

(51) Int. Cl.7: **B26B 21/40**

(21) Application number: **01306342.5**

(22) Date of filing: **24.07.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Pennella, Andrew J.**
Stamford, Connecticut 06903 (US)
• **Richard, Paul D.**
Shelton, Connecticut 06484 (US)
• **Rivers, David F.**
Connecticut 06492 (US)

(30) Priority: **28.07.2000 US 626194**

(71) Applicant: **WARNER-LAMBERT COMPANY**
Morris Plains New Jersey 07950 (US)

(74) Representative:
Simpson, Alison Elizabeth Fraser et al
Urquhart-Dykes & Lord, 30 Welbeck Street
London W1G 8ER (GB)

(54) **Razor heads with intermediate guard elements**


(57) Razor heads comprising at least one blade (60,70,80) and a plurality of guard elements (90) over the leading edge (61,71,81) at a plurality of intermediate portions. According to preferred embodiments, the guard elements (90) are integrally molded with at least one or more of a blade support (20); spacer element(s) (95), forward guard member (50) and cap member (30). The use of integrally molded guard elements facilitate efficient, quicker and less expensive manufacturing,

provide greater design flexibility, and provide greater blade stability.

Additionally, in preferred embodiments, when the molded guard elements (90) are aligned with spacers (95), these guard elements, do not interfere with the rinsability of the razor head.

The intermediate guard elements also provide additional sites for the placement of shaving aids (40) and other skin flow control materials such as materials having a relatively high coefficient of friction.

FIG. 1

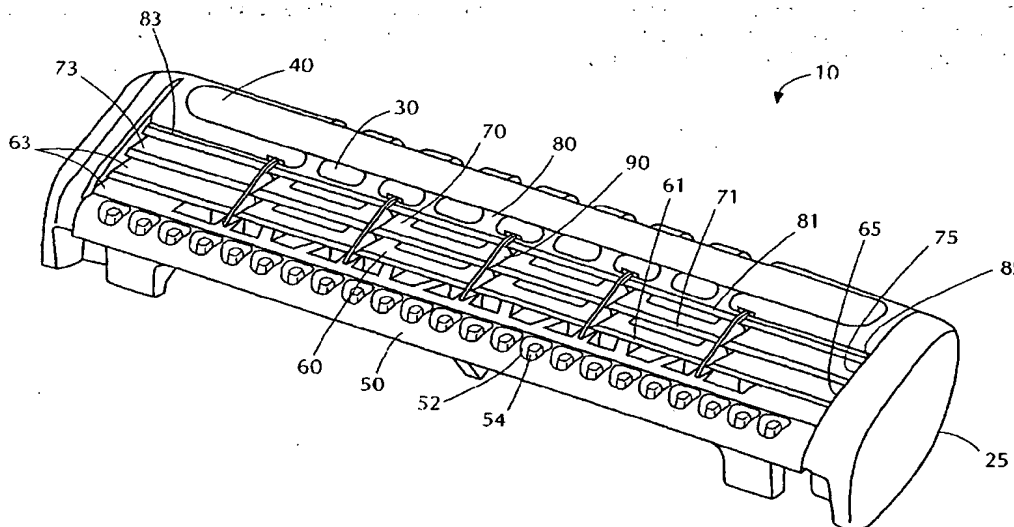

EP 1 184 141 A2

Descripti n

[0001] The present invention is directed to razor heads such as shaving cartridges and, more particularly, to razor heads comprising intermediate guard elements.

BACKGROUND OF THE INVENTION

[0002] Many razor heads found on the market have a guard member disposed forwardly of the cutting edges of two blades and a cap member. Each of these four elements contact the skin surface during shaving and, therefore, are often referred to as "skin-engaging" elements. In a typical safety razor, these four skin-engaging elements are disposed in a spaced relation such that a small space is provided between the guard member and the first blade edge, another space is provided between the two blade edges, and another space may be provided between the second blade edge and the skin-engaging portion of the cap member. Such spaces are typically provided between the skin-engaging portions of these four elements, though not necessarily between other portions of these elements which do not contact the skin. For example, the forward or "seat" blade may be attached directly to the guard member at a point remote from the cutting edge of the seat blade but a space would typically be provided between the skin-engaging surface of the guard member and the sharpened edge of the seat blade.

[0003] Though it has been formerly recognized that the relative positioning and spacing of the skin-engaging portions of these skin-engaging elements affects the flow of skin across the cutting edges of the blades as well as the shaving angle at which the skin contacts the blade edges, it is desirable to provide still greater skin flow control.

[0004] A relatively recent improvement to the field of wet shaving relating to the control of skin as it flows between blades is the use of wire wrapped blades. Wire wrapped blades comprise at least one metal wire wrapped, in spaced intervals, around the sharpened leading edge of a plurality of blades to limit the amount of skin that can flow between the blades.

[0005] The use of wires to wrap blades provides an advantage during shaving, however, manufacturing is inherently complicated by the need to position the wires relative to the blade edges. Additionally, previously known wire wrapped blades have utilized a single size wire with a constant diameter which places limitations upon the shape and contour of the guard elements spaced along the cutting edge of the blades. Additionally, it can be difficult to secure wire guard elements across the cutting edge of a blade in a razor head. These wires also do not significantly inhibit movement of the blade edges in a direction perpendicular to a shaving stroke during shaving.

[0006] Therefore, it would be desirable to provide ra-

zor heads with improved skin flow controls which are easier to manufacture, relatively inexpensive to manufacture, which provide greater design flexibility for controlling skin as it flows over the cutting edges of one or more blades during shaving, and which permit greater flexibility of the entire razor head during shaving.

SUMMARY OF THE INVENTION

[0007] The various aspects of the present invention are directed to novel skin-engaging elements for razor heads including their design, construction and manufacture. The various aspects of the present invention are designed to provide a razor head with a safe, close and comfortable shave while facilitating an easier, more reproducible and less expensive manufacturing process which provides greater design flexibility with respect to the size and positioning of guard elements, shaving aids and high coefficient of friction materials relative to the blades. Additionally, disclosed embodiments are also designed to facilitate the easy removal of shaving debris which accumulates in spaces of razor heads of the present invention.

[0008] One embodiment of the present invention is a razor head comprising at least one blade having a first end, a second end, intermediate portions and a leading edge. A plurality of guard elements are molded over the leading edge at a plurality of intermediate portions. According to preferred embodiments of the present invention, the molded guard elements are integrally molded with one or more of a blade support, spacer element(s), forward guard member(s) or cap member(s). It is believed that the use of integrally molded guard elements, especially when the guard elements are integrally molded with blade supports or spacers, provide greater stability and allow less relative movement of the blade edges than wire wrapped blades since the molded guard elements tend to hold the blades in position more rigidly when the blades encounter hair during a shaving stroke. Those skilled in the art will appreciate that it is desirable to maintain predetermined blade spacing during shaving. Relative movements of the blade edges during shaving which significantly change the edge to edge spacing can result in a less than optimum shave. The various embodiments of the present invention also provide greater design flexibility in the size and shape of the intermediate guard elements. For example, the intermediate guard elements can readily extend outwardly from the blade edge any desired distance and a single razor head can readily be provided with guard elements which extend different distances from the edge of one blade or the edges of different blades.

[0009] Additionally, in preferred embodiments, when the molded guard elements are aligned with spacers, these guard elements do not inhibit the rinsability of the razor head.

[0010] The various embodiments of the present invention also advantageously provide additional sites for

the placement of shaving aids and other skin flow control materials such as materials having high or low coefficients of friction.

[0011] Other aspects of the present invention comprise methods of manufacturing razor heads. One preferred method comprises insert molding a razor head with a blade support, forward guard member, cap member, spacers and novel guard elements integrally molded in a single or sequential molding process.

[0012] Other methods of the present invention comprise sequentially molding shaving aids and resilient skin engaging materials having high or low coefficients of friction onto skin engaging surfaces of the disclosed razor heads.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Figure 1 is a perspective view of one embodiment of the present invention.

[0014] Figure 2 is an enlarged, partial perspective view of a portion of the razor head shown in Figure 1.

[0015] Figure 3 is a plan view of the embodiment illustrated in Figure 1.

[0016] Figure 4 is a rear, perspective view of the embodiment illustrated in Figure 1.

[0017] Figure 5 is a bottom perspective view of the embodiment illustrated in Figure 1.

[0018] Figure 6 is a cross sectional view of another embodiment of the present invention.

[0019] Figure 7 is a cross sectional view of an alternative embodiment of the present invention.

[0020] Figure 8 is a top view of an embodiment of the present invention comprising five, relatively thin intermediate guard elements.

[0021] Figure 9 is a top view of an embodiment of the present invention comprising five wider intermediate guard elements.

[0022] Figure 10 is a top view of an embodiment of the present invention comprising five tapered intermediate guard elements.

[0023] Figure 11 is a top view of an embodiment of the present invention wherein a shaving aid extends from the cap forwardly on each of five intermediate guard elements.

[0024] Figure 12 is a top view of an embodiment of the present invention comprising high coefficient of friction material on each of five intermediate guard elements.

[0025] Figure 13 is a top view of another embodiment of the present invention wherein four intermediate guard elements are unevenly spaced.

[0026] Figure 14 is a top view of a still further embodiment of the present invention wherein intermediate guard elements cover portions of some blades but not all blades.

DETAILED DESCRIPTION

[0027] The various embodiments of the present invention relate to new razor heads comprising molded, preferably thermoplastic; guard elements positioned over intermediate portions of at least one leading edge of a blade in order to provide enhanced skin flow control and blade stability during shaving. The various aspects of the present invention also comprise novel methods of manufacturing razor heads as described in greater detail below. As used herein, the term "razor head" is meant to include cartridges adapted to be connected to a separate razor as well as the operative cutting portion of a disposable razor wherein the handle and cutting portion are formed as a single unit.

[0028] One preferred embodiment of the present invention comprises a razor head 10 and is illustrated in Figure 1. Razor head 10 comprises a base 20, cap member 30, shaving aid 40, forward guard member 50, leading blade 60, middle blade 70 and cap blade 80. Each blade comprises a sharp edge 61, 71, 81, a first end 63, 73, 83 and a second end 65, 75, 85, respectively. In accordance with this illustrated embodiment of the present invention, a plurality of intermediate guard elements 90 extend over the leading edges 61, 71, 81 of each blade. As best shown in Figure 2 the intermediate guard elements 90 of this illustrated embodiment are integrally formed with blade spacers 95, base 20 and cap member 30. From the present description, those skilled in the art will appreciate that these elements, namely the base 20, guard element 90, spacers 95 and cap members 30 can be formed in a single injection molding step utilizing any suitable thermoplastic material such as polypropylene or ABS (acetalbutylstyrene).

[0029] Guard elements 90 advantageously limit the amount of skin that can flow between adjacent blades and thereby minimizes the risk of nicks and cuts during shaving. While the embodiment of the present invention illustrated in Figure 1 comprises five intermediate guard elements 90, it is within the scope of the present invention to utilize either more or fewer guard elements as desired. As used herein with respect to the positioning of the guard elements, the terms "intermediate" and "intermediate portions" refer to the portions of the blades between first ends 63, 73, 83 and second ends 65, 75 and 85. The "intermediate" guard elements are spaced from the razor heads sidewalls 23 and 25 which commonly extend over the sides and forward corners of each blade in order to prevent those sharpened corners from nicking or cutting the person shaving.

[0030] In this illustrated embodiment, forward guard member 50 is advantageously formed with a material comprising a higher coefficient of friction, e.g., rubber or rubber type compounds, than the thermoplastic utilized to form the base 20, guard elements 90 and cap member 30, in order to stretch the skin before it encounters the sharp edges of the blades. The forward guard element also comprises an irregular surface in order to provide

better gripping of the skin surface prior to contact with the blades. In this illustrated embodiment, forward guard member 50 advantageously comprises a plurality of recesses 52 and projections 54 in order to better grip the skin surface. Forward guard element 50 is preferably also formed in a molding process, most preferably during a sequential molding step following the molding of the blade support 20, cap 30, and guard elements 90.

[0031] The shaving aid 40 can be formed of any desired materials, such as those known in the art, including but not limited to polyox, aloe vera, lanolin, vitamin E, etc. Shaving aid 40 is preferably molded within a recess of the cap 30 and is also preferably formed on razor head 10 in a sequential molding step before, after or simultaneously with the formation of forward guard member 50.

[0032] According to this preferred illustrated embodiment, each guard element 90 and spacer 95 advantageously support substantial portions of each blade in order to minimize the relative movement, e.g., deflection or "chatter", of the blades during shaving. As best shown in Figure 2, these illustrated intermediate guard elements are formed with a wider base which tapers to a narrower skin engaging portion. The broader base provides greater blade support. As best shown in Figure 2, the rear view of Figure 4, and bottom view of Figure 5, the position of spacers 95 and guard elements 90 advantageously leave substantial open spaces which enhance rinsing of shaving debris, e.g., hair, shaving cream, etc., from the razor head. The bottom perspective view of Figure 4 also shows flexing members and wash through slots in the blades.

[0033] The razor heads of the present invention can be rigid, flexible or can take forms other than the illustrated embodiments. The illustrated embodiment of Figures 1-5 is designed for attachment to a razor (not shown).

[0034] Figure 6 is a cross sectional view of one embodiment of the present invention. This figure illustrates the distance D by which the leading skin engaging surface of guard element 90 precedes the sharp edges of each blade. The distance D is defined herein as the distance between the leading edge of a blade and the forward surface of the guard element as measured along a line perpendicular to the leading edge of the guard element. Since the guard elements of the various embodiments of the present invention are formed utilizing molds, the distance D can be designed to be any distance desired. Moreover, one advantage of the various embodiments of the present invention when compared with wire wrapped blades is that the distance D can be greater or less than the width W of the guard elements, as illustrated in the front view of Figure 11. It is also within the scope of the present invention to provide different size and different shape guard elements within a single razor head. Moreover a single guard element can have different distances D relative to one or more blades. As shown in Figure 6, the distance D is less for seat blade

160 than the corresponding distance D of cap blade 180 along this single guard element 190.

[0035] Figure 7 is a cross sectional view of an alternative embodiment of the present invention wherein the distances D for three blades are more constant those distances in the embodiment illustrated in Figure 6. It is also within the scope of the present invention to provide a razor head comprising a plurality of intermediate guard elements wherein the distance D of a first guard element does not extend as far from the leading edges of a particular blade as does the leading edge of another guard element from the same blade. Thus, from the present description and drawings, it will be appreciated that the present invention provides a very wide degree of design flexibility in changing the distance D and width W between different blades or at different intermediate positions along the same blade in order to optimize shave safety and comfort. The cross sectional views of Figures 6 and 7 also clearly illustrate how intermediate guard elements provide additional support to prevent unwanted movement of blade edges during shaving.

[0036] Figure 8 is a top view of an alternative embodiment of the present invention. As compared to the guard elements shown in Figures 1-3 which have pyramidal cross sections for providing extra support to the blades, the guard elements 290 of Figure 8 have a constant width for their entire height.

[0037] Figure 9 shows still another embodiment wherein the guard elements 390 are wider, having a width W .

[0038] It is also within the scope of the present invention to provide intermediate guard elements having different shapes. As illustrated in Figure 10, one razor head of the present invention comprises guard elements 490 which are tapered in a manner which provides greater blade exposure for the seat blade and less exposure for the cap blade. Other configurations are also possible. As illustrated in the embodiment of Figure 11, the intermediate guard elements 590 of the present invention also provide additional locations for skin engaging elements having different coefficients of friction than thermoplastic. In the embodiment illustrated in Figure 11, shaving aid material 540 extends down from the cap area 530 along the length of the intermediate guard elements 590 in order to provide areas of low friction skin engaging contact. While this illustrated embodiment shows each of five intermediate skin engaging elements as supporting a "shaving aid" material, it is also within the scope of the present invention to provide a shaving aid material on only one or more of the intermediate guard elements or only on portions of one or more of an intermediate element.

[0039] Figure 12 illustrates a still further embodiment of the present invention wherein a high coefficient of friction material 650, for example, a rubber type compound, is positioned on the intermediate guard elements 690. As described above with respect to the shaving aid type material, the high coefficient of friction material 650 can

be positioned on all of the intermediate guard elements, on only some of the guard elements or on portions of one or more guard elements. Though not illustrated, one or more of the guard elements can support both a shaving aid and a high coefficient of friction material.

[0040] Though the previously illustrated embodiments have shown guard elements which are substantially evenly spaced along the length of the blade edges, it is also within the scope of the present invention to provide one or more intermediate guard elements which are not evenly spaced. As shown in the embodiment of the present invention illustrated in Figure 13, intermediate guard elements 790 can be positioned at different locations along the length of the blade edges.

[0041] According to a still further embodiment of the present invention, at least one intermediate guard element 890 extends over a first blade edge 860 but not over a second blade edge 880. In this manner, the corresponding portion of the second blade edge 880 contacts the skin surface while a corresponding portion of another blade in the same razor head does not contact the skin surface. Therefore, in accordance with another aspect of the present invention, an example of which is shown in Figure 14, an intermediate guard element may cover portions of one or more blades but not all of the blades in the razor head.

[0042] One embodiment of the present invention comprises a razor head comprising a blade support, at least one blade comprising a first end, a second end, intermediate portions and a sharp edge, and at least one and preferably a plurality of spaced intermediate molded skin engaging elements covering intermediate portions of the sharp edge. While the embodiment of the present invention illustrated in Figure 1 comprises three blades, at least some of the advantages of the present invention can be realized in a single blade or double blade razor head. Alternatively, more than three blades can be utilized.

[0043] The materials utilized to form the molded guard elements of the present invention are most preferably thermoplastics such as polypropylene and ABS (acetal-butylstyrene) but can also comprise chemical resistant materials to maintain the integrity of the razor head.

[0044] As noted above, one advantage of the various embodiments of the present invention is that the guard elements can readily be molded and therefore the entire razor head can be molded in a single or sequential molding process. One preferred method of making a razor head according to the present invention comprises providing a plurality of blades each comprising a first end, a second end, intermediate portions and at least one sharp edge, arranging the plurality of blades in a mold cavity with the sharp edges in spaced relation, and molding a plurality of guard elements around spaced, intermediate portions of the leading edges of the blades. While the guard elements could conceivably be molded around unsharpened portions of the blade, with present technology it is preferable to provide blades with an en-

tirely sharpened leading edge and for the intermediate guard elements to cover sharpened intermediate portions of the leading edge of the blade. Additionally, one or more of the other elements of the razor head can be formed in a single step or in a separate, e.g. sequential, step. For example, the base, cap and side walls can be formed before, during or after the molding of the guard elements. In the preferred illustrated embodiments, the base, side walls, cap, spacers and guard elements are formed in a single molding step. Then the shaving aid materials and high friction guard member are formed in one or more subsequent steps.

[0045] According to a less preferred method of making razor heads of the present invention, a plurality of elements including some or each of the cap, blades, guard member, spacers, intermediate guard elements and end caps can be formed separately and then assembled. For example, one or more intermediate guard elements can be integrally formed with spacers and the spacers are then assembled along with a base, cap and plurality of blades to form a razor head. For example, a razor head of the present invention can be assembled comprising a cap member having downwardly extending intermediate guard elements which cover portions of one or more blade edges.

Claims

1. A razor head comprising:
 - a blade support;
 - at least one blade comprising a first end, a second end, intermediate portions and a leading edge comprising at least one sharp portion; and
 - at least one thermoplastic, intermediate skin engaging guard element covering an intermediate portion of said leading edge.
2. A razor head according to claim 1 comprising a plurality of thermoplastic, intermediate skin engaging guard elements.
3. A razor head according to claim 1 comprising a plurality of blades each comprising at least one sharp edge.
4. A razor head according to claim 1 wherein a major portion of the space between blades is unobstructed to facilitate rinsing of shaving debris.
5. A razor head according to claim 1 wherein at least one of said guard elements comprises a leading edge comprising a shaving aid.
6. A razor head according to claim 1 wherein at least one of said guard elements comprises a resilient material comprising a higher coefficient of friction

than said blade support.

7. A razor head according to claim 1 wherein at least one guard element comprises a leading surface spaced a first distance from a leading blade edge and a second guard element comprises a leading surface spaced a second distance from a leading blade edge, and wherein said first distance is different from said second distance.
8. A razor head according to claim 1 wherein said razor head is flexible.
9. A razor head according to claim 1 wherein at least one intermediate guard element comprises a leading surface spaced a first distance from a first blade edge and a second distance from a second blade edge, as measured along the planes of the respective blades, and wherein said first distance is different from said second distance.
10. A razor head according to claim 1 wherein at least one intermediate guard element has a width which is tapered in a plane substantially parallel to the cutting plane of the blade.
11. A razor head according to claim 1 wherein at least one intermediate guard element has a leading edge and a base and wherein the leading edge is narrower than the base.
12. A razor head according to claim 1 wherein at least one intermediate guard element has a width which is greater than the distance between the leading edge of the intermediate guard element and the forward blade edge as measured along the plane of the blade.
13. A razor head according to claim 1 wherein at least one intermediate guard element comprises both a high coefficient of friction material and a shaving aid material.
14. A razor head according to claim 1 comprising a plurality of evenly spaced intermediate guard elements.
15. A razor head according to claim 1 comprising a plurality of unevenly spaced intermediate guard elements.
16. A razor head according to claim 1 wherein said intermediate guard element extends about 0.5 mm - 4 mm from said leading edge of said blade.
17. A razor head according to claim 1 wherein said intermediate guard element extends about .1 mm - 2 mm from said leading edge of said blade.
18. A razor head according to claim 1 wherein said intermediate guard element extends about .14 mm - 18 mm from said leading edge of said blade.
19. A razor head according to claim 1 wherein said guard elements are spaced about 2 mm - 8 mm.
20. A razor head according to claim 1 wherein said guard elements are spaced about 3 mm - 7 mm.
21. A razor head according to claim 1 wherein said intermediate guard element is positioned proximate the center of said razor head.
22. A razor head according to claim 1 wherein said razor head comprises at least two blades and at least one of said guard elements comprises a leading surface spaced a first distance from one leading edge of a blade and a different, second distance from another blade.
23. A razor head according to claim 1 further comprising a spacer integrally formed with said guard elements.
24. A razor head according to claim 1 further comprising a cap member.
25. A razor head according to claim 24 wherein said cap member is segmented cap member.
26. A razor head according to claim 24 wherein said cap member is integrally formed with said guard elements.
27. A razor head according to claim 24 further comprising a shaving aid.
28. A razor head according to claim 1 further comprising a forward guard member.
29. A razor head according to claim 28 wherein said forward guard member comprises a resilient portion.
30. A razor head according to claim 1 further comprising a segmented cap member.
31. A razor head according to claim 30 further comprising a shaving aid.
32. A razor head according to claim 30 further comprising a forward guard member.
33. A razor head according to claim 32 wherein said forward guard member comprises a resilient portion.
34. A razor head according to claim 1 wherein said intermediate guard element is integrally formed with

said blade support.

35. A razor head comprising:

a blade support;
a plurality of blades, each of said blades comprising a first end, a second end, intermediate portions and a sharp edge; and
a plurality of spaced, thermoplastic intermediate guard elements each covering an intermediate portion of said sharp edge.

36. A razor head according to claim 35 comprising at least one spacer and wherein at least one of said intermediate guard elements is integrally formed with said spacer.

37. A razor head according to claim 35 wherein at least one of said guard elements comprises a leading edge comprising a shaving aid.

38. A razor head according to claim 35 wherein at least one of said guard elements comprises a resilient material comprising a higher coefficient of friction than said blade support.

39. A razor head according to claim 35 wherein at least one guard element comprises a leading surface spaced a first distance from a leading blade edge and a second guard element comprises a leading surface spaced a second distance from a leading blade edge, and wherein said first distance is different from said second distance.

40. A razor head according to claim 35 wherein said razor head is flexible.

41. A razor head according to claim 35 wherein at least one intermediate guard element comprises a leading surface spaced a first distance from a first blade edge and a second distance from a second blade edge, as measured along the planes of the respective blades, and wherein said first distance is different from said second distance.

42. A razor head according to claim 35 wherein at least one intermediate guard element has a width which is tapered in a plane substantially parallel to the cutting plane of the blade.

43. A razor head according to claim 35 wherein at least one intermediate guard element has a width which is greater than the distance between the leading edge of the intermediate guard element and the forward blade edge as measured along the plane of the blade.

44. A razor head according to claim 35 wherein said in-

termediate guard element extends about 0.5 mm - 4 mm from said leading edge of said blade.

45. A razor head according to claim 35 wherein said intermediate guard element extends about .1 mm - 2 mm from said leading edge of said blade.

46. A razor head according to claim 35 wherein said intermediate guard element extends about .14 mm - 18 mm from said leading edge of said blade.

47. A method of making a razor head comprising the steps of:

providing a plurality of blades, each comprising a first end, a second end, a leading edge comprising intermediate portions and at least one sharp edge;
arranging said plurality of blades in a mold cavity with said sharp edges in spaced relation;
molding a plurality of guard elements around spaced, intermediate portions of said sharp edges of said blades.

48. A method of making a razor head according to claim 47 wherein said molding step comprises molding a blade support.

49. A method of making a razor head according to claim 48 wherein said guard elements and said blade support are integrally molded.

50. A method of making a razor head according to claim 49 wherein said guard elements and said blade support are molded in a single step.

51. A method of making a razor head according to claim 47 wherein said molding step comprises molding a cap member and a shaving aid in a sequential molding process.

52. A method of making a razor head according to claim 47 further comprising the step of molding a shaving aid onto said cap member.

53. A method of making a razor head according to claim 47 comprising molding a flexible blade support.

54. A method of making a razor head according to claim 47 comprising the step of molding a shaving aid on at least one of said guard elements.

55. A method of making a razor head according to claim 47 comprising the step of molding a material comprising a higher coefficient of friction than said blade support on at least one of said intermediate guard elements.

FIG. 1

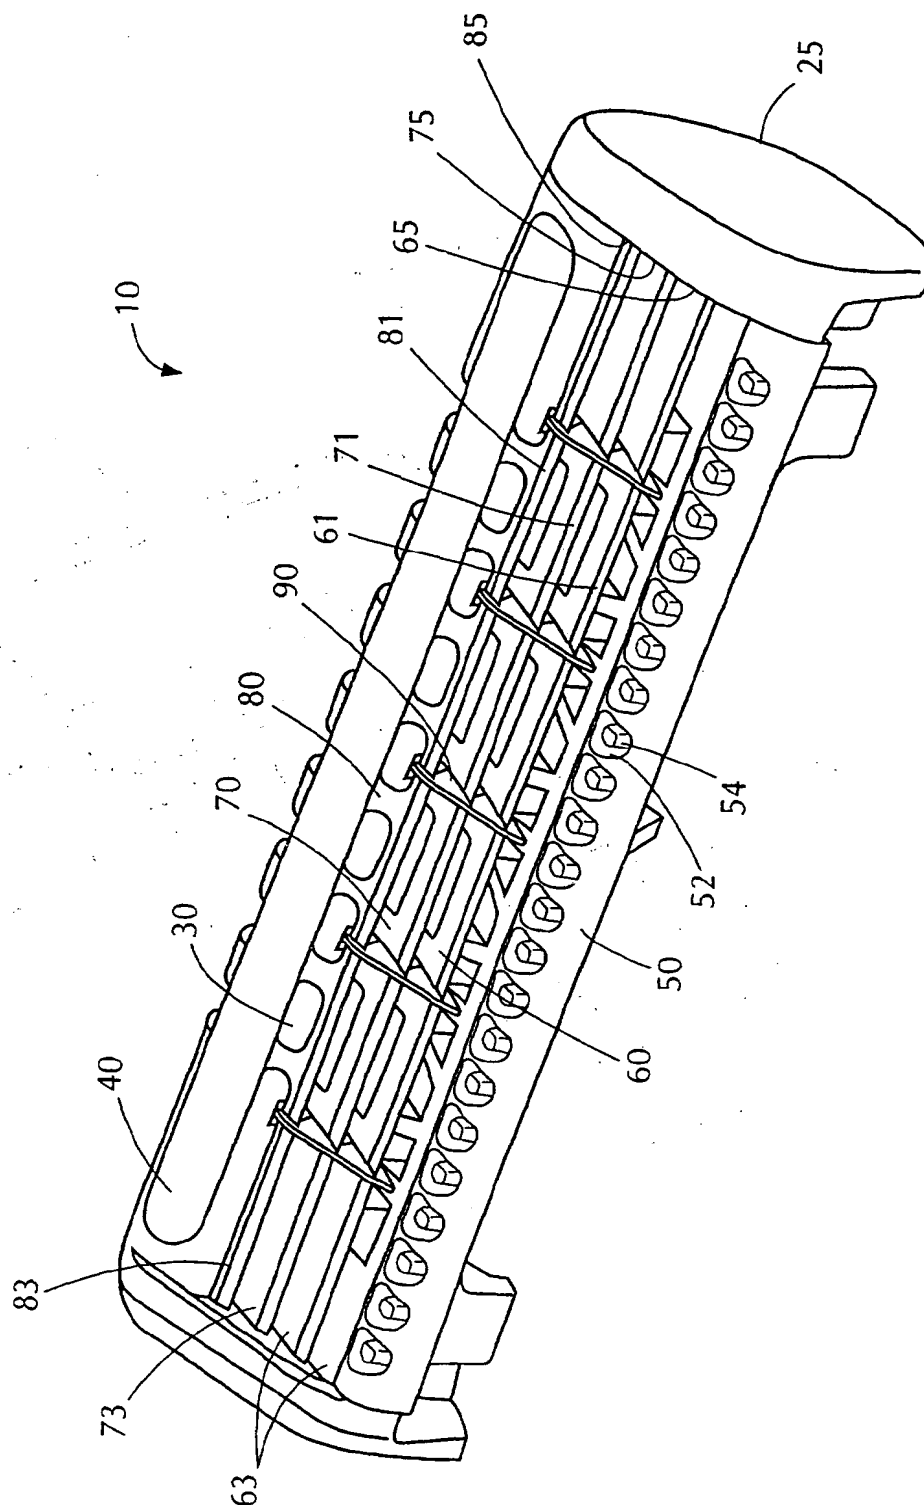


FIG. 2

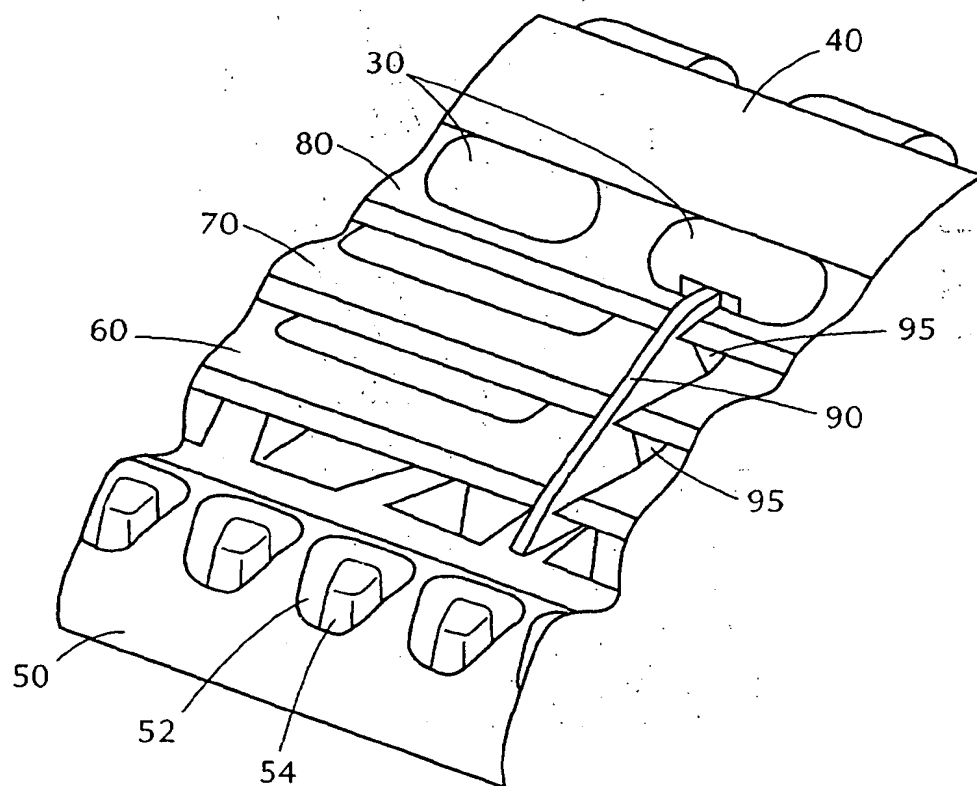


FIG. 3

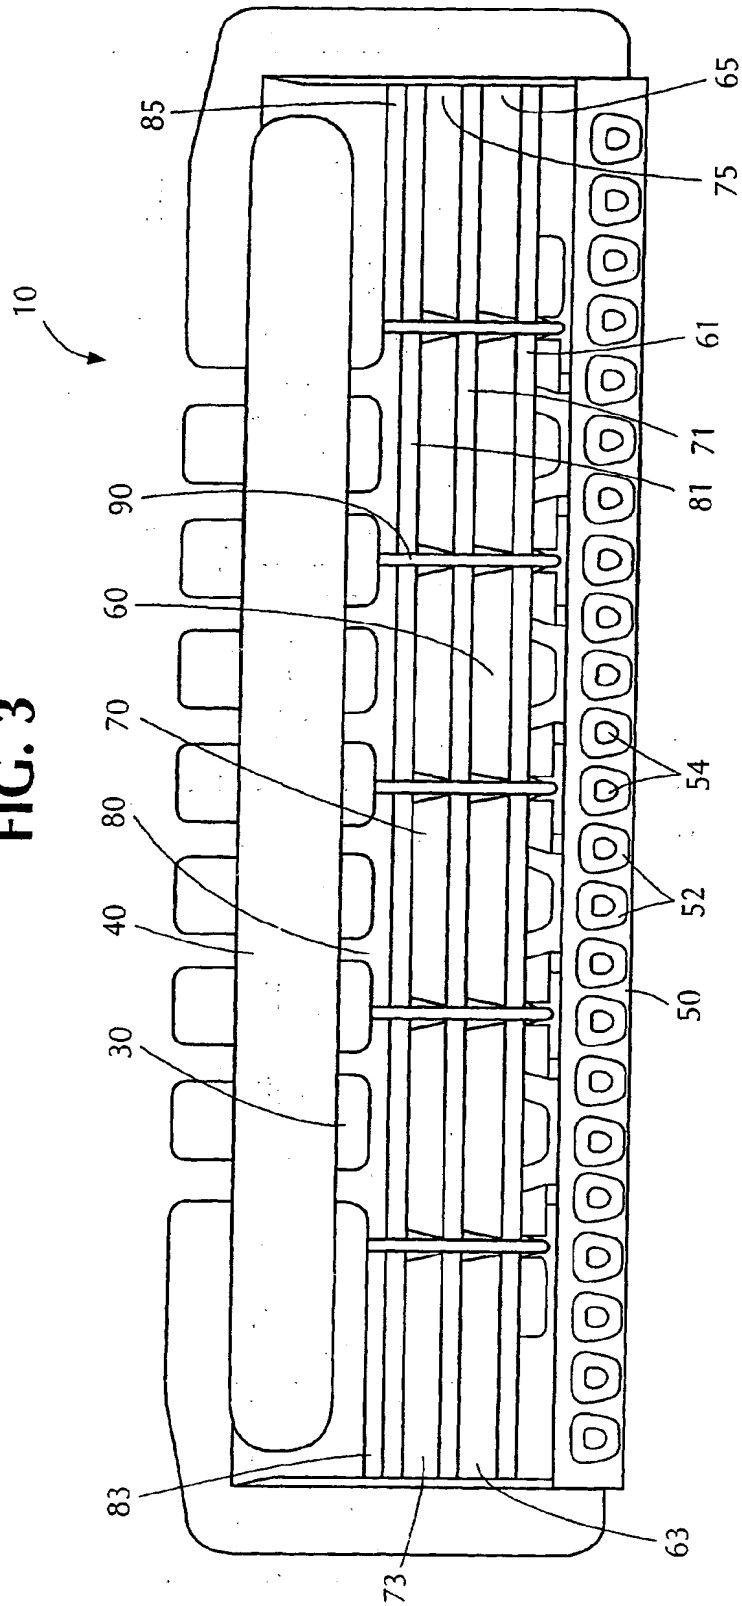


FIG. 4

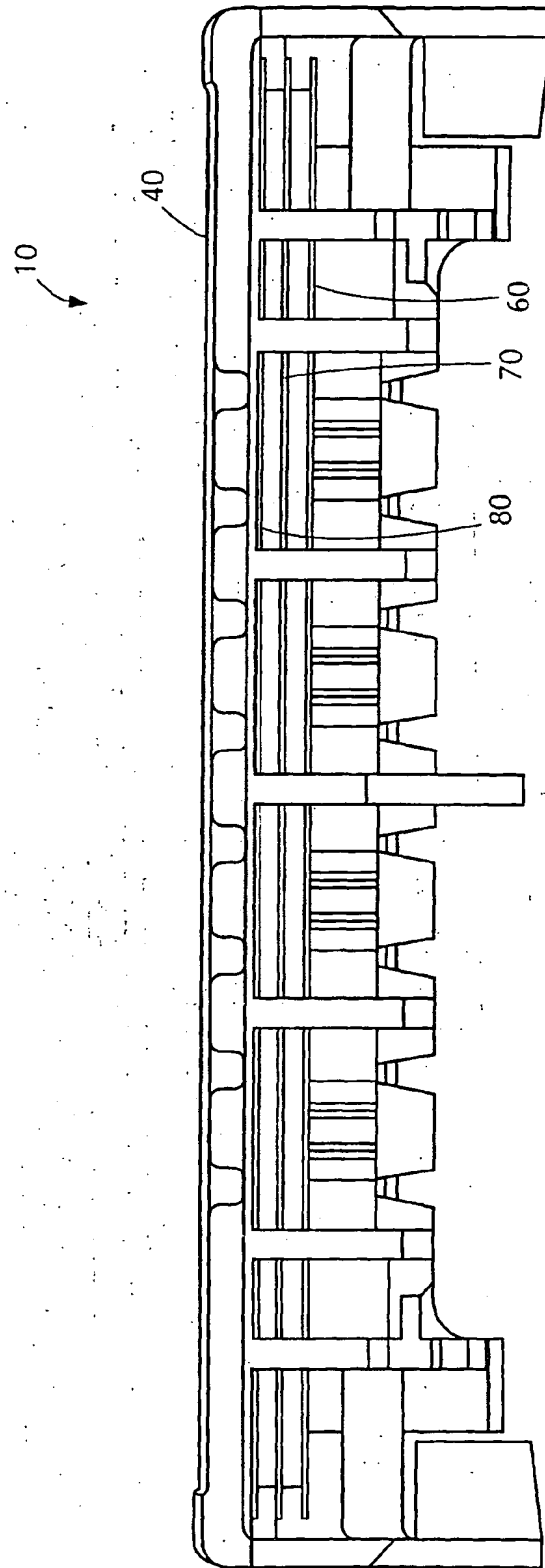
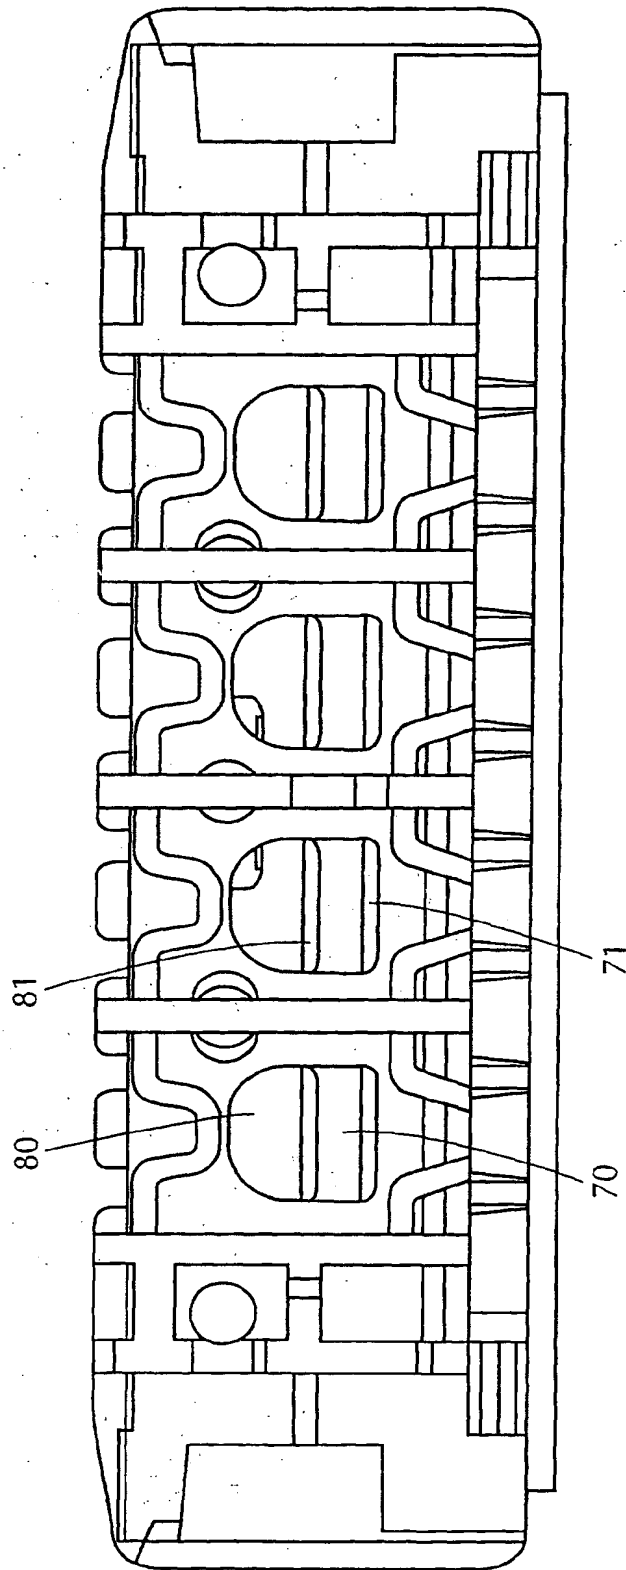


FIG. 5



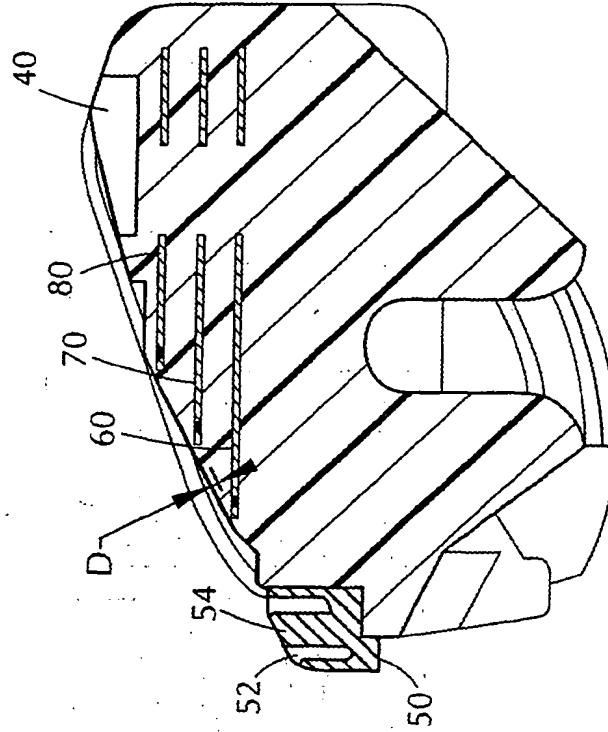


FIG. 7

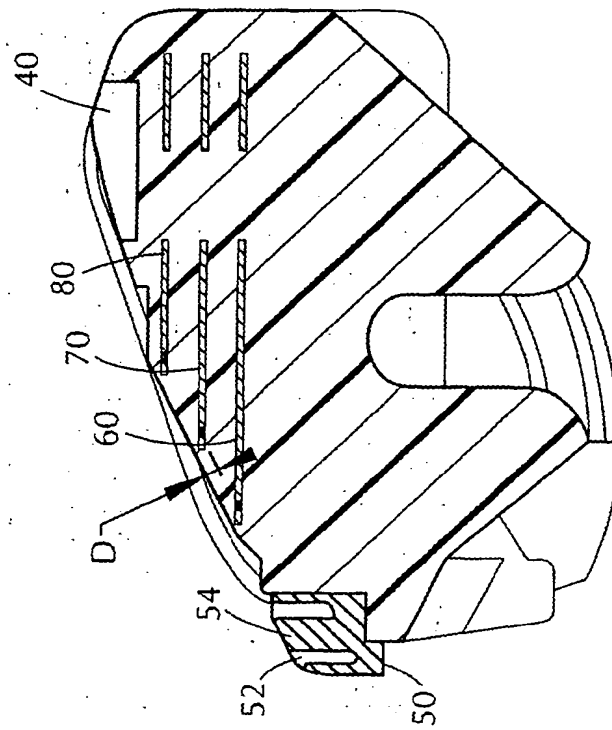


FIG. 6

FIG. 8

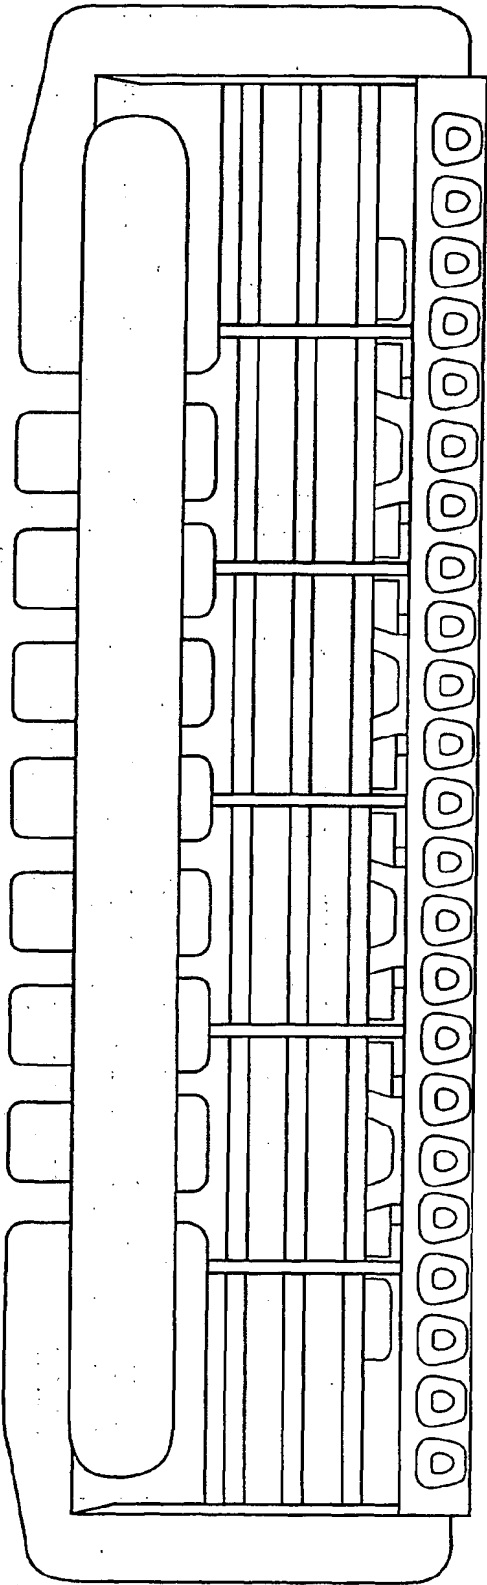


FIG. 9

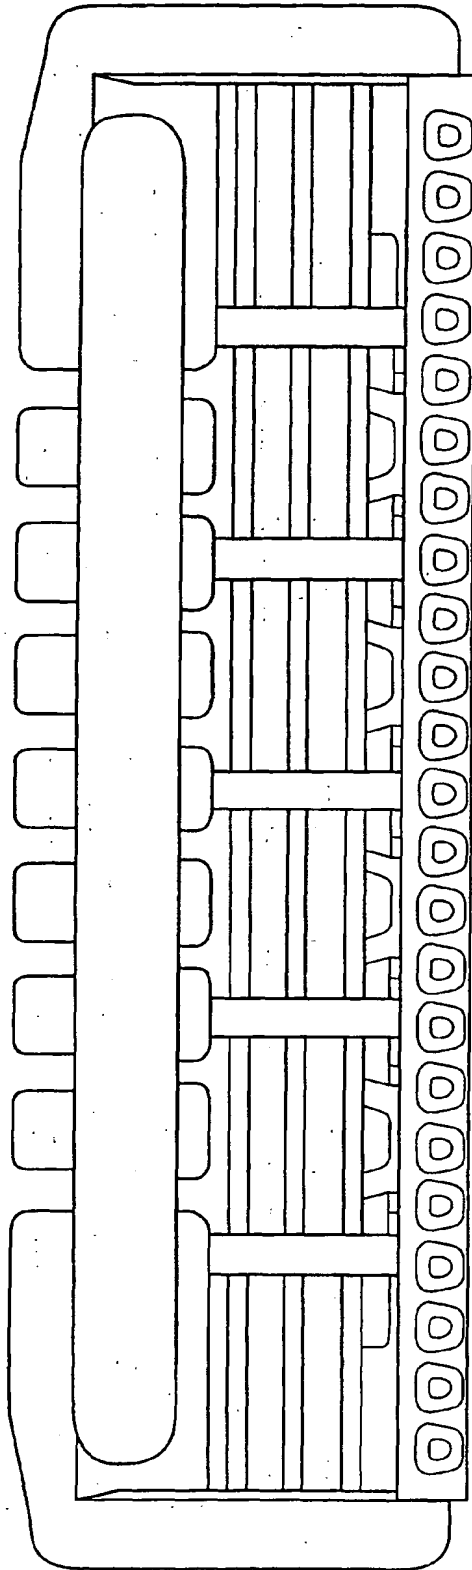


FIG. 10

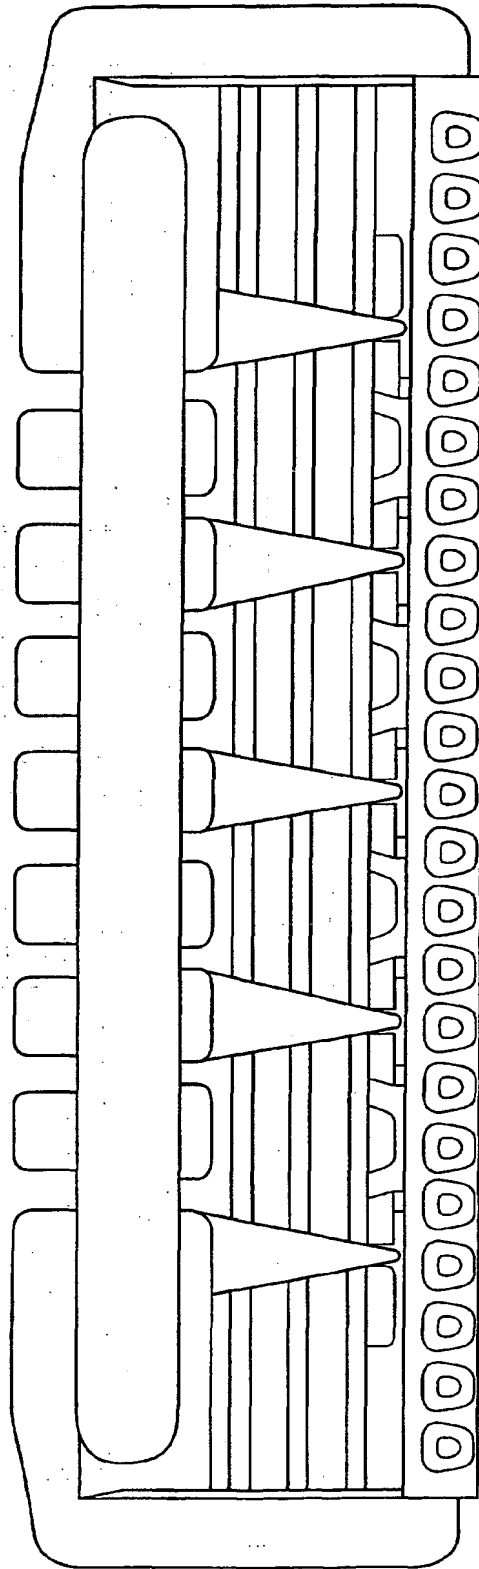


FIG. 11

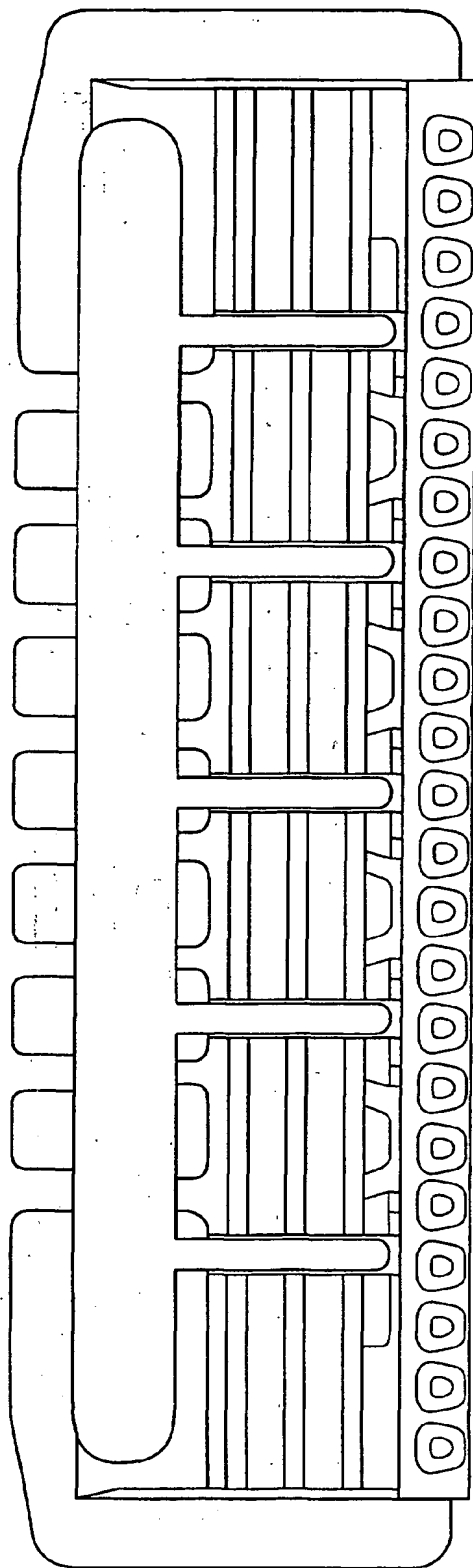


FIG. 12

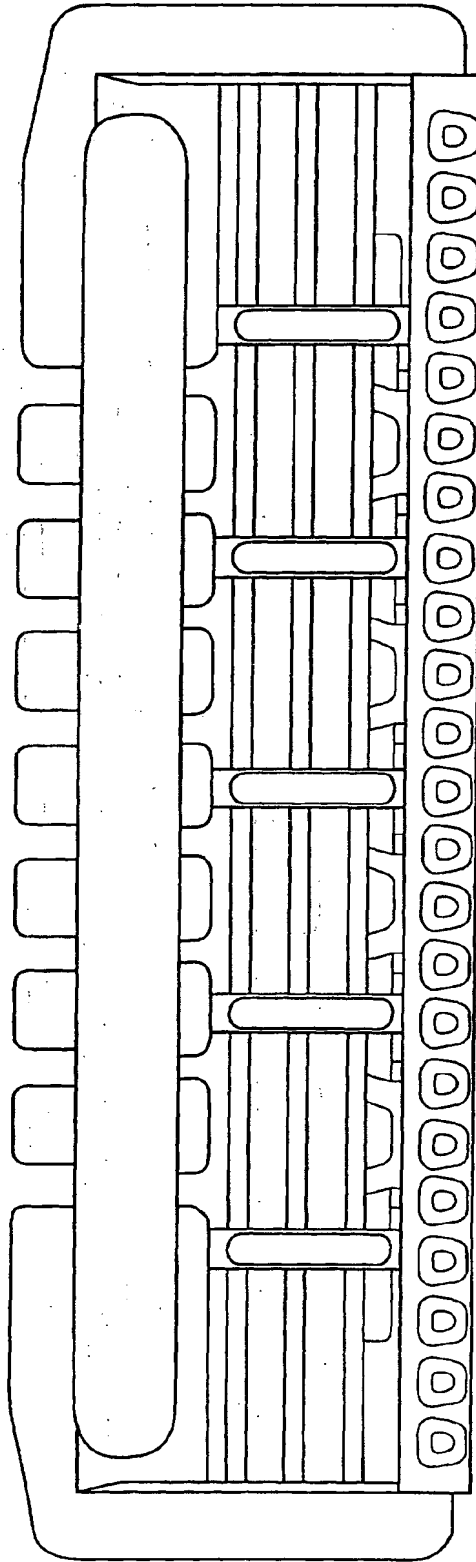


FIG. 13



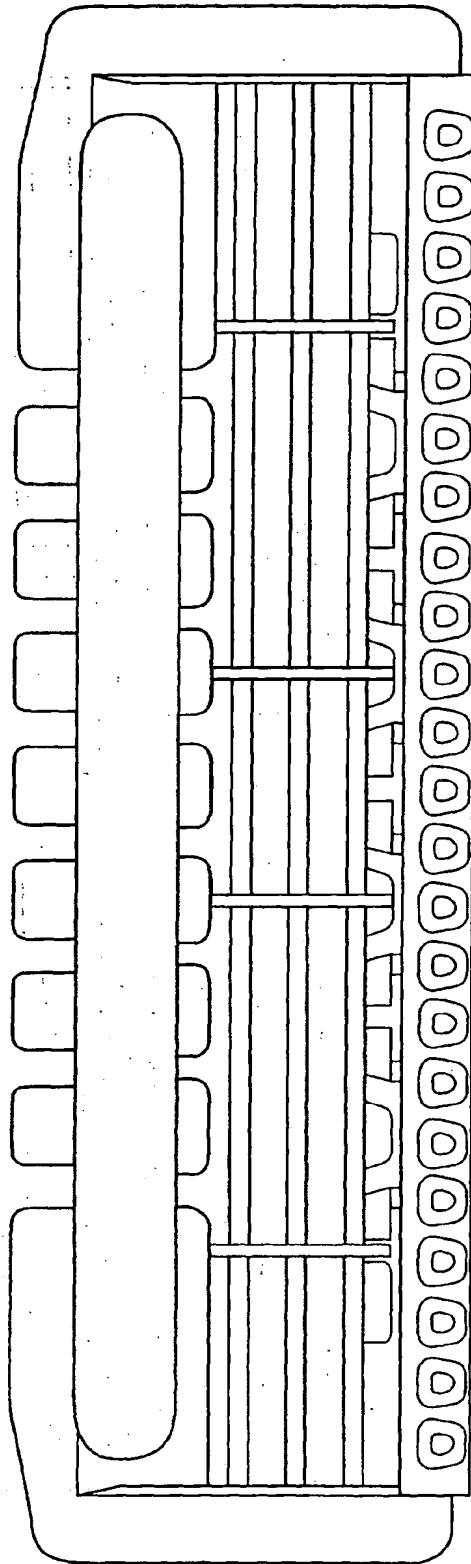


FIG. 14



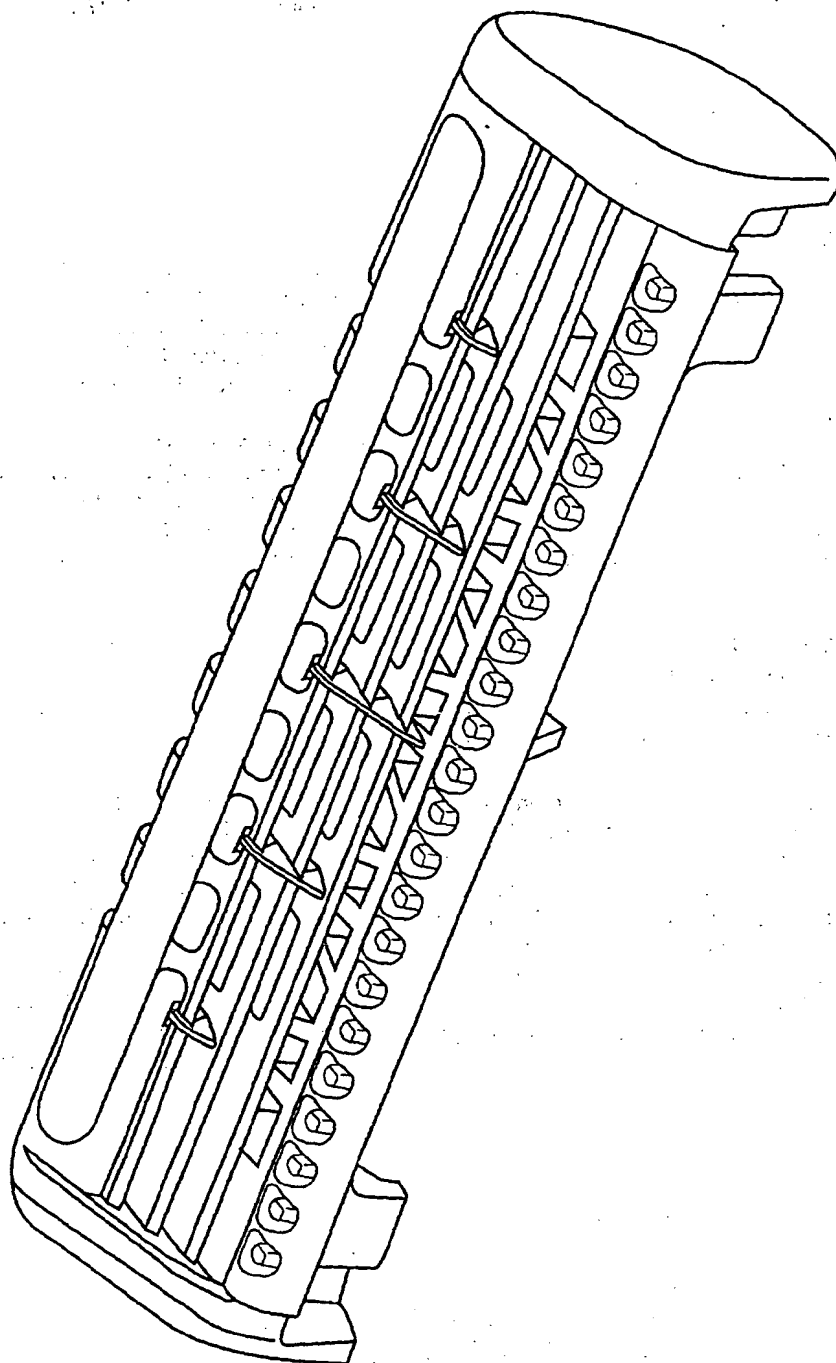

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 184 141 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: **B26B 21/40**

(43) Date of publication A2:
06.03.2002 Bulletin 2002/10

(21) Application number: **01306342.5**

(22) Date of filing: **24.07.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

• **Richard, Paul D.**
Shelton, Connecticut 06484 (US)
• **Rivers, David F.**
Connecticut 06492 (US)

(30) Priority: **28.07.2000 US 626194**

(71) Applicant: **WARNER-LAMBERT COMPANY**
Morris Plains New Jersey 07950 (US)

(74) Representative:
Simpson, Allison Elizabeth Fraser et al
Urquhart-Dykes & Lord,
30 Welbeck Street
London W1G 8ER (GB)

(72) Inventors:
• **Pennella, Andrew J.**
Stamford, Connecticut 06903 (US)

(54) **Razor heads with intermediate guard elements**


(57) Razor heads comprising at least one blade (60,70,80) and a plurality of guard elements (90) over the leading edge (61,71,81) at a plurality of intermediate portions. According to preferred embodiments, the guard elements (90) are integrally molded with at least one or more of a blade support (20), spacer element(s) (95), forward guard member (50) and cap member (30). The use of integrally molded guard elements facilitate efficient, quicker and less expensive manufacturing,

provide greater design flexibility, and provide greater blade stability.

Additionally, in preferred embodiments, when the molded guard elements (90) are aligned with spacers (95), these guard elements do not interfere with the rinsability of the razor head.

The intermediate guard elements also provide additional sites for the placement of shaving aids (40) and other skin flow control materials such as materials having a relatively high coefficient of friction.

FIG. 1

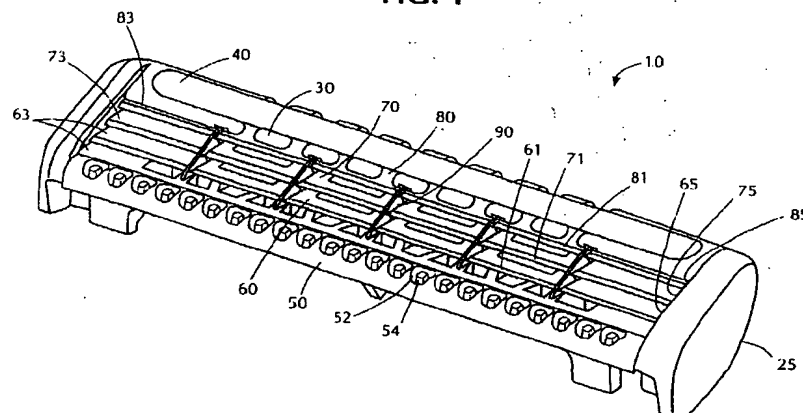



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 6342

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 447 084 A (ALTHAUS WOLFGANG) 5 September 1995 (1995-09-05)	1-4, 14-21, 27,35, 44-46	B26B21/40
Y	* column 3, line 28 - column 4, line 52; claims 1,5; figures 1-5,7 *	8,24,25, 28-33,40	
A	* claims 1,6 *	47	
X	GB 2 178 687 A (FEINBERG JOSEPH GEORGE) 18 February 1987 (1987-02-18)	1-4,14, 16-21, 24-26, 30,35	
Y	* page 1, line 15 - page 2, line 8; figures 1-3 *		
Y	EP 0 314 266 A (WARNER LAMBERT CO) 3 May 1989 (1989-05-03)	8,40	
	* page 3, line 52 - page 4, line 9; figures 1-3 *		
Y	US 5 313 705 A (RIVERS DAVID F ET AL) 24 May 1994 (1994-05-24)	24,25, 30,31	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
	* column 2, line 59 - column 3, line 4; figure 1 *		B26B
Y	US 5 794 343 A (KOHRLING DOUGLAS R ET AL) 18 August 1998 (1998-08-18)	28,29, 32,33	
	* column 3, line 26 - column 4, line 21 *		
A	US 5 318 429 A (BUTLIN DECEASED C EDWARD ET AL) 7 June 1994 (1994-06-07)	47	
	* column 9, line 24 - column 14, line 37; figures 2,9 *		
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 10 January 2002	Examiner Maier, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (Prelim)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6342

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5447084	A	05-09-1995	GB 2265327 A	29-09-1993
			DE 9210043 U1	01-10-1992
			DE 59302859 D1	18-07-1996
			DE 59302860 D1	18-07-1996
			EP 0559129 A1	08-09-1993
			EP 0559130 A1	08-09-1993
			ES 2088176 T3	01-08-1996
			ES 2088177 T3	01-08-1996
			GB 2288760 A , B	01-11-1995
GB 2178687	A	18-02-1987	NONE	
EP 0314266	A	03-05-1989	US 4854043 A	08-08-1989
			AT 84740 T	15-02-1993
			AU 1758488 A	04-05-1989
			BR 8804283 A	23-05-1989
			CA 1329876 A1	31-05-1994
			DE 3877695 D1	04-03-1993
			DE 3877695 T2	27-05-1993
			DK 578188 A	01-05-1989
			EP 0314266 A1	03-05-1989
			ES 2040855 T3	01-11-1993
			GR 3007170 T3	30-07-1993
			IL 85951 A	21-11-1991
			JP 1129874 A	23-05-1989
			JP 1937562 C	09-06-1995
			JP 6067416 B	31-08-1994
			MX 165576 B	24-11-1992
			PT 87565 A , B	31-07-1989
			US 4976028 A	11-12-1990
			US 5003694 A	02-04-1991
			ZA 8802516 A	27-12-1989
US 5313705	A	24-05-1994	US 5185927 A	16-02-1993
			AU 680876 B2	14-08-1997
			AU 6129394 A	29-08-1994
			BR 9405771 A	19-12-1995
			DE 69409096 D1	23-04-1998
			DE 69409096 T2	20-08-1998
			EP 0681518 A1	15-11-1995
			JP 8506743 T	23-07-1996
			WO 9417967 A1	18-08-1994
			AT 153584 T	15-06-1997
			AU 656985 B2	23-02-1995
			AU 1971092 A	30-12-1992
			CA 2102522 A1	14-11-1992

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6342

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5313705 A		DE 69220053 D1	03-07-1997
		DE 69220053 T2	13-11-1997
		EP 0584215 A1	02-03-1994
		ES 2104925 T3	16-10-1997
		GR 3023900 T3	30-09-1997
		JP 6507329 T	25-08-1994
		MX 9202163 A1	01-11-1992
		WO 9220499 A1	26-11-1992
US 5794343 A	18-08-1998	AU 726850 B2	23-11-2000
		AU 7163098 A	08-12-1998
		BR 9808779 A	01-08-2000
		CN 1255884 T	07-06-2000
		EP 1097788 A1	09-05-2001
		EP 0981425 A2	01-03-2000
		HU 0003400 A2	28-02-2001
		JP 2001524860 T	04-12-2001
		NO 995519 A	07-01-2000
		PL 336789 A1	17-07-2000
		WO 9851457 A2	19-11-1998
US 5318429 A	07-06-1994	US 5053178 A	01-10-1991
		US 5104605 A	14-04-1992
		US 5141694 A	25-08-1992
		AR 240147 A1	28-02-1990
		AR 240148 A1	28-02-1990
		AT 68393 T	15-11-1991
		AT 93174 T	15-09-1993
		AU 605270 B2	10-01-1991
		AU 1408788 A	27-10-1988
		AU 604867 B2	03-01-1991
		AU 1408888 A	27-10-1988
		BR 8801848 A	22-11-1988
		BR 8801929 A	22-11-1988
		CA 1298048 A1	31-03-1992
		CA 1303313 A1	16-06-1992
		DE 3865507 D1	21-11-1991
		DE 3883279 D1	23-09-1993
		DE 3883279 T2	27-01-1994
		DK 220988 A	25-10-1988
		DK 221088 A	25-10-1988
		EP 0289228 A1	02-11-1988
		EP 0288301 A2	26-10-1988
		ES 2026651 T3	01-05-1992
		ES 2042738 T3	16-12-1993
		GR 3002921 T3	25-01-1993

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 6342

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-01-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5318429 A		HK 112194 A	21-10-1994
		IL 85419 A	21-11-1991
		IL 85420 A	21-11-1991
		JP 2817914 B2	30-10-1998
		JP 63315093 A	22-12-1988
		JP 1064682 A	10-03-1989
		JP 2817915 B2	30-10-1998
		MX 167535 B	29-03-1993
		MX 165932 B	10-12-1992
		PT 87288 A ,B	12-05-1989
		PT 87289 A ,B	12-05-1989
		SG 121994 G	13-01-1995
		ZA 8800903 A	25-10-1989
		ZA 8800904 A	25-10-1989
		AT 159679 T	15-11-1997
		AU 634134 B2	11-02-1993
		AU 7916691 A	02-01-1992
		BR 9102591 A	21-01-1992
		CA 2044958 A1	21-12-1991
		CN 1057422 A ,B	01-01-1992
		DE 69128049 D1	04-12-1997
		DE 69128049 T2	02-04-1998
		EP 0462807 A1	27-12-1991
		FI 912997 A	21-12-1991
		JP 3115906 B2	11-12-2000

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)